


M12-L

LEFT MAIN SPEAKER

M-12L is a left speaker for MAG Theatron PERFORMANCE main screen array. It is based on long-excursion woofer and a HF driver with a extremely low distortion. With horn coverage being horizontally symmetrical, M-12L is matched perfectly with M-12C and M-12R.

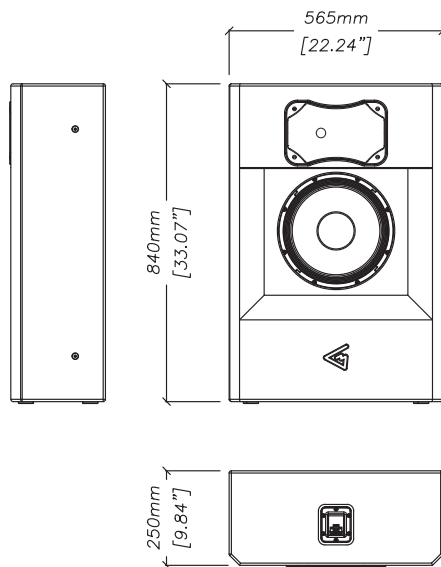

CONNECTIONS

Use a Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in the input signal.

Do not exceed the input powers, abovementioned in the specifications, while exploiting the speaker system.

The speaker system comes with phoenix terminals for connection to the amplifier.

SAFETY INSTRUCTIONS

1. Do not pour liquids on the speaker system - this may cause driver cone destruction and an unappealing speaker appearance. Do not allow direct sunlight on the speaker cone - this will reduce its resource dramatically. For fire safety do not install the speaker system near open flames or heating elements.
2. Do not use the speaker system with the damaged connector or speaker cable - this is an electric shock hazard and fire hazard.
3. Make sure the speaker system is firmly set up on the ceiling, stage, or wall (where applicable).
4. While setting the speaker system up on a slope or slippery surface, make necessary arrangements to avoid its movement due to its vibration.
5. This loudspeaker system is capable of delivering a significant sound pressure level. To avoid permanent or temporary hearing damage or loss, prolonged exposure to sound pressure levels exceeding values over 90 dB should be limited.



SPECIFICATIONS

| | |
|----------------------------------|--|
| Frequency response (± 3 dB) | 50 - 20000 Hz |
| Frequency range (-10 dB) | 41 - 22000 Hz |
| Max continous SPL | 121,5 dB |
| Sensitivity (1W/1m half-space) | 97 dB |
| High-frequency driver | 1-inch (1,75 inch voice coil) titanium dome |
| Low/Mid frequency woofer | 12-inch (2,5 inch voice coil) 4-wave long excursion suspension |
| Coverage | 90° H x 50° V Coverage Control HF horn horizontal axis panned 15° left |
| Nominal impedance | 4 Ohm |
| Power rating | 300 W |
| Connectors | Phoenix terminal |
| Mounting | 4x M8 points for antishock wall mounting |
| Dimension (W x H x D) | 565 x 840 x 250 mm |
| Net weight | 32,2 kg |