



# Theatron TDC amplifier firmware update procedure



TP240902  
27.Sep.2024

This document describes the firmware update procedure for the Theatron TDC.


1. Update the network upgrade.

1.1. Copy the "web\_x.x" and "Updater xxxx-xx-xx" folders to C:/

 web_1.1	9/27/2024 5:56 PM	File folder
 Updater 2024-09-27	9/27/2024 5:56 PM	File folder

1.2. Enter the "web\_x.x" folder and launch the "UpgradeHtml.exe".

1.3. In the window that opened, enter the amplifier's IP address (192.168.0.7 by default), select "M4" in the "Select Product" and press "....."

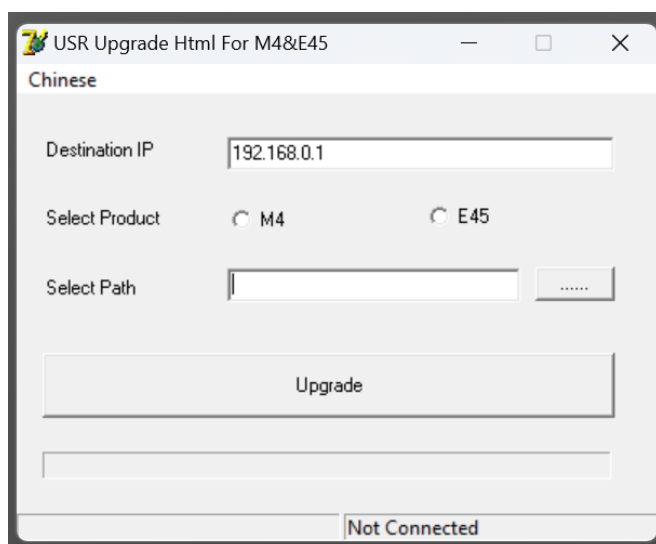


1.4. Navigate to "\web\_x.x\web\_pack\_x.x" folder, and confirm.


1.5. Press "Upgrade" to perform the network adapter upgrade. Upgrade procedure will take under 5 seconds. If the upgrade is successful, the message in the bottom left should read "Upgrade complete".

2. Update the amplifier firmware.

2.1. Open the "Updater xxxx-xx-xx" folder, and launch the "TdcUpdater.exe"

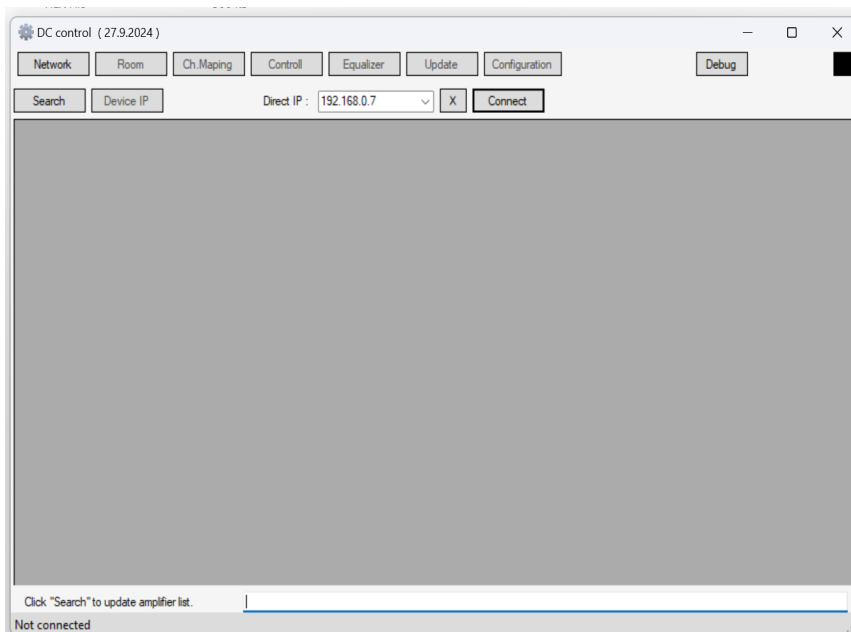


2.2. Type the amplifier's IP address (192.168.0.7 by default) in the Direct IP field, and press "Connect"

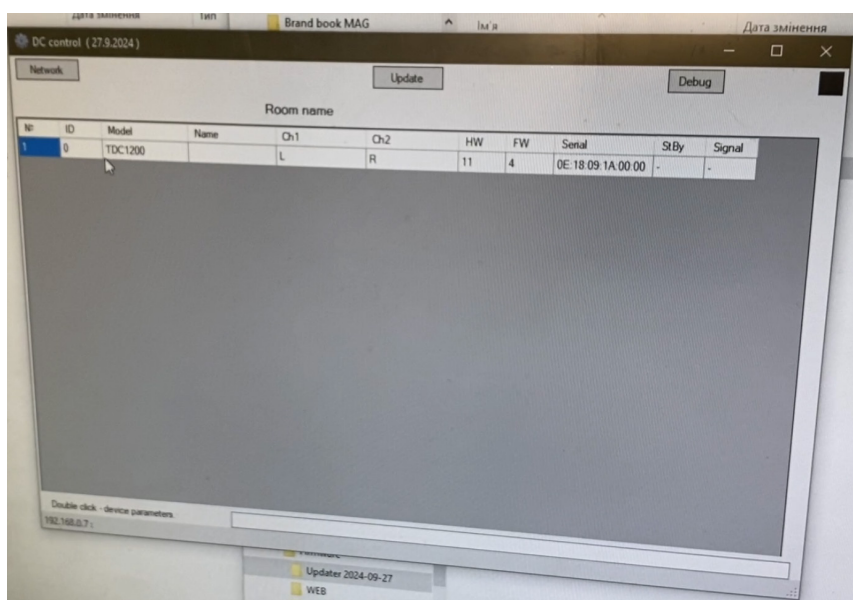


2.3. Select the amplifier from the list, and press "Update"

2.4. In the opened page, press "Check"

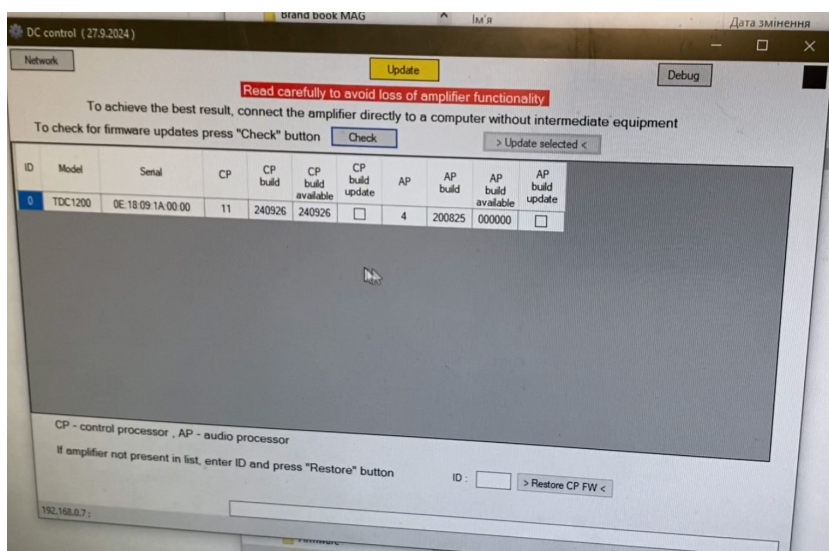

2.5. Check the "CP build update" checkbox ONLY, and press "Update selected". While updating, do not unplug the amplifier mains cable, do not turn off the amplifier, and do not disconnect the LAN cable.

2.6. Update procedure will take about 3 to 5 minutes.

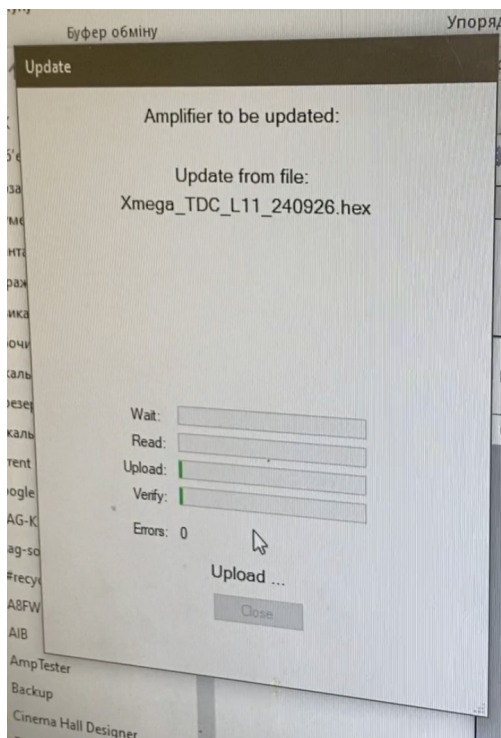

2.7. While updating, amplifier's "Edit" LEDs will blink.



2.8. Upon successful update, the update tool will show "Done!" message.

